


“ COOL ROOM ” EXIT SIGN

This single sided Exit Sign is fully weatherproof to IP67 and specially designed to operate in a cool room to temperatures of minus 20°C. CATS II monitored version available. *This Exit must remain illuminated at all times.*

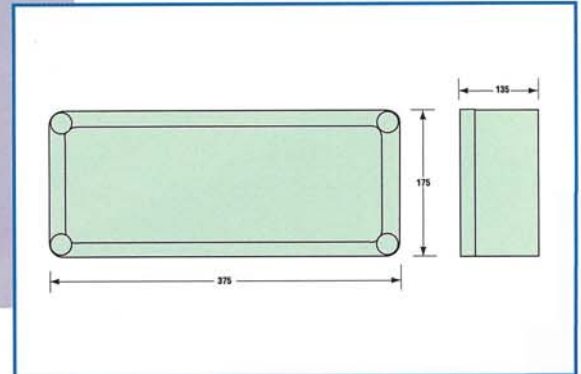

CATALOGUE NUMBER:


MAINTAINED
STANDARD: CP110CR/1-4
CATS II: CPC110CR/1-4

Diffuser type is specified by adding relevant number from key below to Catalogue Number. e.g. CP110CR/3

SPECIFICATIONS:

SUPPLY:	240V±5% 50Hz .06A. 14.5VA
LAMP:	Fluorescent 10WT8
BATTERY:	Nickel Cadmium High Temperature to 70°C
CHARGER:	Two rate- high C/10 lowC/20
CASE:	Glass reinforced resin (grey) rated IP67
DIFFUSER:	U.V. stabilised clear polycarbonate with inset silk screened opal acrylic panel
REFLECTOR:	White painted zincseal steel
STANDARD:	Charge indicator LED and test switch
GUARANTEE:	Against faulty parts or workmanship - 12 months
SERVICE:	White Lite operates a service section to fully service any White Lite fitting
COMPLIANCE:	AS/NZS 2293.1 1995, Building Code of Australia 1990, S.I.S.I.R. CP19
CERTIFICATION:	See Information Sheet for spacings table.
DIMENSIONS:	375mm length x 190mm height x 135mm deep

SINGLE SIDED



1 2 3 4



Head Office:

42 Beaumont Road Mt Kuring-gai NSW 2080 Australia PO Box 47 Mt Kuring-gai NSW 2080 Australia
PHONE: +61 2 9457 8877 FAX: +61 2 9457 9596

CATS II MONITORING AVAILABLE

