


E M E R G E N C Y F L U O R E S C E N T B A T T E N - D I F F U S E D

Diffused batten luminaires are ideal for providing economical general and emergency lighting in corridors, offices and similar open areas. Twin 18W and 36W battens can be manufactured in sustained and non-maintained modes if specially required. 10W battens are available as non maintained or permanently maintained only and are supplied with lamps. CATS II monitored version available.

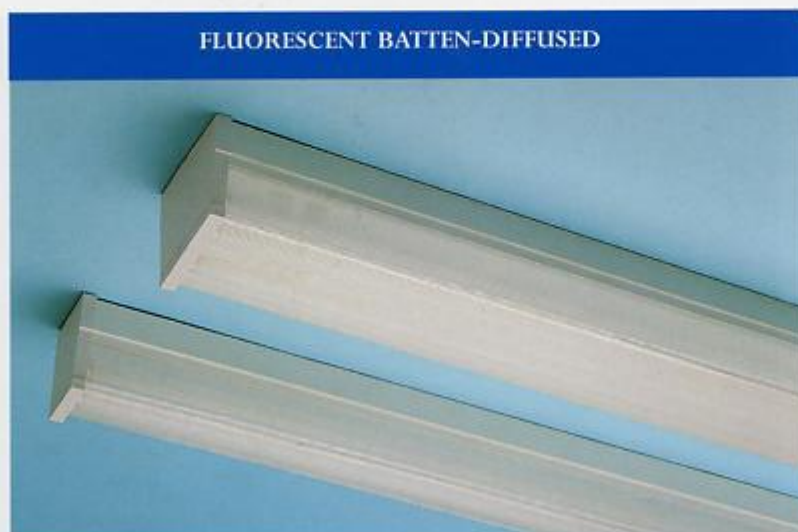

MODE/CHARGER	10W	18W	2x18W	36W	2x36W
Non-Maintained / Single rate		SS118NM		SS136NM	
Non-Maintained / Two rate high C/10 low C/20	SSD010NM	SSD118NM		SSD136NM	
Maintained / Single rate		SS118M		SS136M	
Maintained / Two rate high C/10 low C/20	SSD110M	SSD118M		SSD136M	
Combined Maintained / Single rate			SS218M		SS236M
Combined Maintained / Two rate high C/10 low C/20			SSD218M		SSD236M

SUPPLY:	240V±5% 50Hz							
BATTERY:	Nicad High temperature to 70°C							
CASE:	White powder coated zincseal steel.							
REFLECTOR:	White enamelled zincseal steel.							
DIFFUSER:	K12 prismatic acrylic							
STANDARD:	Charge indicator LED and Test switch							
OPTIONAL EXTRA:	3 or 4 hour duration available							
GUARANTEE:	Guaranteed for 12 months against faulty parts or workmanship							
SERVICE:	White Lite operates a service section to fully service any White Lite fitting							
COMPLIANCE:	AS/NZ 2293.1 1995, Building code of Australia 1990, S.I.S.I.R. CP19							
CERTIFICATION:		SSC118NM	SSC118M	SSC218M	SSC136NM	SSC136M	SSC236M	SSC236-5M
	Co	D25	D25	D25	D40	D40	D63	D63
	C90	E16	E16	E16	C25	C25	D50	C40
	C180						D32	D40

Note: All luminaires are tested with CATS II (SSC) and results apply to SS and SSD luminaires



Head Office:

42 Beaumont Road Mt Kuring-gai NSW 2080 Australia PO Box 47 Mt Kuring-gai NSW 2080 Australia

PHONE: +61 2 9457 8877 FAX: +61 2 9457 9596

CATS II MONITORING AVAILABLE

