


EMERGENCY FLUORESCENT BATTEN - WIREGUARD

Wireguard batten luminaires are ideal for providing economical general and emergency lighting in public places, low ceiling car parks and anywhere extra protection is needed. Twin 18W and 36W battens can be manufactured in sustained and non-maintained modes if specially required. CATS II monitored version available.

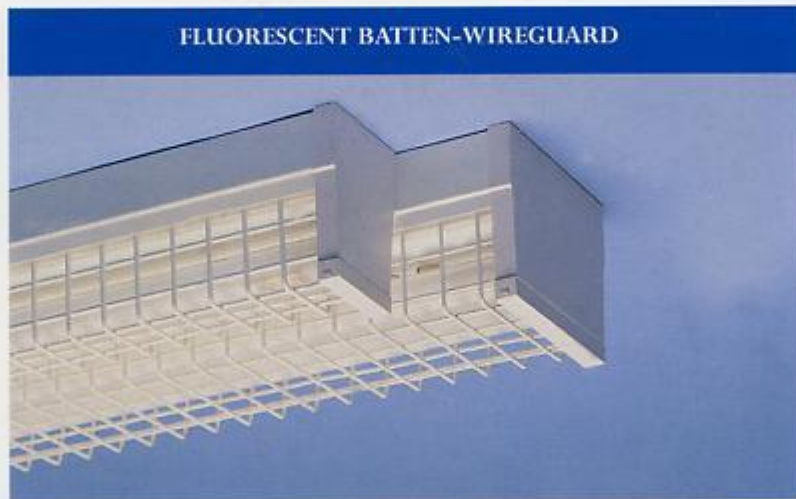

MODE/CHARGER	18W	2x18W	36W	2x36W
Non-Maintained / Single rate	BE118WGNM		BE136WGNM	
Non-Maintained / Two rate high C/10 low C/20	BED118WGNM		BED136WGNM	
Maintained / Single rate	BE118WGM		BE136WGM	
Maintained / Two rate high C/10 low C/20	BED118WGM		BED136WGM	
Combined Maintained / Single rate		BE218WGM		BE236WGM
Combined Maintained / Two rate high C/10 low C/20		BED218WGM		BED236WGM

SUPPLY:	240V±50%				
BATTERY:	Nicad High temperature to 70°C				
CASE:	White powder coated zincseal steel.				
REFLECTOR:	White powder coated zincseal steel.				
WIREGUARD:	Welded steel - coated				
STANDARD:	Charge indicator LED and Test switch				
OPTIONAL EXTRA:	3 or 4 hour duration available				
GUARANTEE:	Guaranteed for 12 months against faulty parts or workmanship				
SERVICE:	White Lite operates a service section to fully service any White Lite fitting				
COMPLIANCE:	AS/NZ 2293.1 1995, Building code of Australia 1990, S.I.S.I.R. CP19				
CERTIFICATION:	BEC218WGM	BEC136WGNM	BEC136WGM	BEC236WGM	BEC236WGM-5
Co	D20	D40	D40	D40	D50
C90	D6.3	C50	C50	C50	D20

Note: All luminaires are tested with CATS II (BEC) and results apply to BE and BED luminaires



Head Office:

42 Beaumont Road Mt Kuring-gai NSW 2080 Australia PO Box 47 Mt Kuring-gai NSW 2080 Australia
PHONE: +61 2 9457 8877 FAX: +61 2 9457 9596

CATS II MONITORING AVAILABLE

