


E M E R G E N C Y F L U O R E S C E N T B A T T E N

Bare batten luminaires are ideal for providing economical general and emergency lighting in stairwells, car parks and similar locations. Twin 18W and 36W battens can be manufactured in sustained and non-maintained modes if specially required. 10W battens are available as non maintained and are supplied with lamps. CATS II monitored version available.

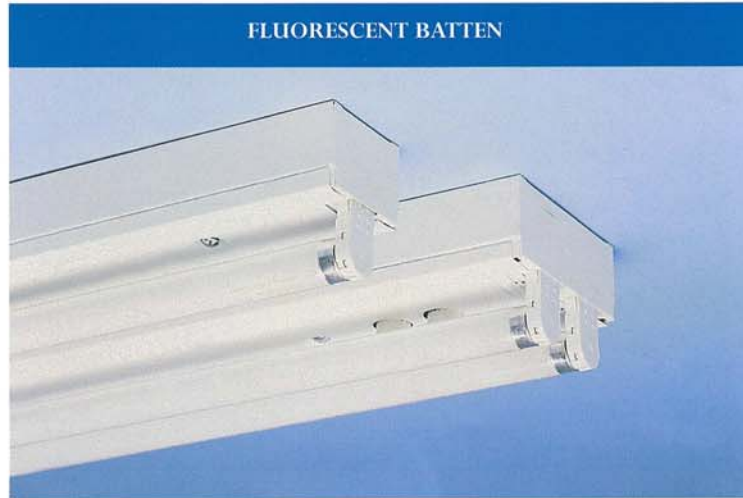

MODE/CHARGER	10W	18W	2x18W	36W	2x36W
Non-Maintained / Single rate		BE118NM		BE136NM	
Non-Maintained / Two rate high C/10 low C/20	BED010NM	BED118NM		BED136NM	
Maintained / Single rate		BE118M		BE136M	
Maintained / Two rate high C/10 low C/20	BED110M	BED118M		BED136M	
Combined Maintained / Single rate			BE218M		BE236M
Combined Maintained / Two rate high C/10 low C/20			BED218M		BED236M

SUPPLY:	240V±50% 50Hz					
BATTERY:	Nicaid High temperature to 70°C					
CASE:	White powder coated zincseal steel.					
REFLECTOR:	White enamelled zincseal steel.					
STANDARD:	Charge indicator LED and Test switch					
OPTIONAL EXTRA:	3 or 4 hour duration available					
GUARANTEE:	Guaranteed for 12 months against faulty parts or workmanship					
SERVICE:	White Lite operates a service section to fully service any White Lite fitting					
COMPLIANCE:	AS/NZ 2293.1 1995, Building code of Australia 1990, S.I.S.I.R. CP19					
CERTIFICATION:	BEC118NM	BE118NM	BEC218M	BEC136NM	BEC136M	BEC236M
	C ₀ D20	D20	D20	D40	D40	D40
	C ₉₀ E20	E20	E20	C40	C40	D20

Note: All luminaires are tested with CATS II (BEC) and results apply to BE and BED luminaires



Head Office:

42 Beaumont Road Mt Kuring-gai NSW 2080 Australia PO Box 47 Mt Kuring-gai NSW 2080 Australia
PHONE: +61 2 9457 8877 FAX: +61 2 9457 9596

CATS II MONITORING AVAILABLE

