

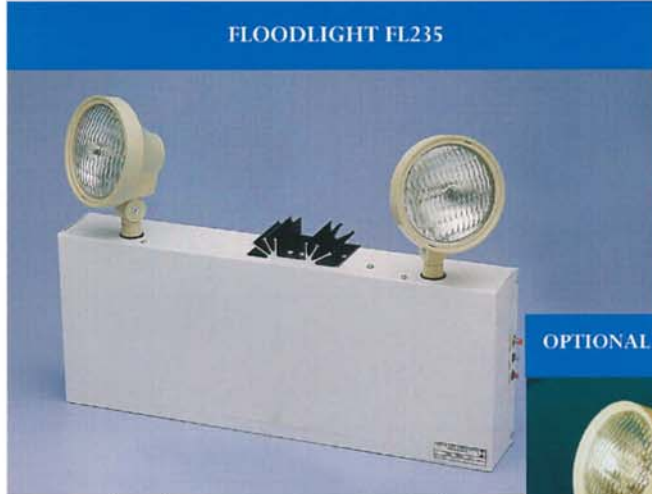


TWIN HEAD FLOODLIGHT

This compact self-contained emergency floodlight has twin moveable heads which can also be mounted as an optional single unit for greater versatility (as illustrated). CATS II monitored version available.

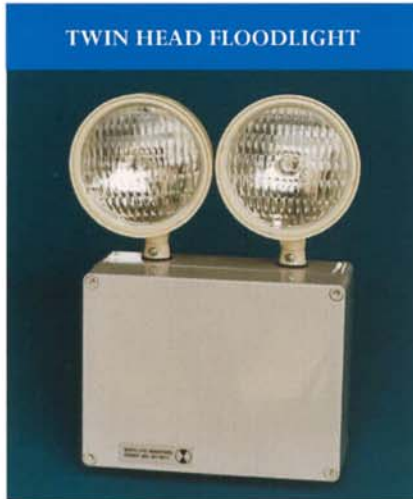

CATALOGUE NUMBER:
HIGH OUTPUT:

LEAD ACID	NICAD
FL210	FL210N/FLD210N
FL235	

SPECIFICATIONS:

SUPPLY:	240V±5% 50Hz .06A. 14VA FL210/FL310 – 0.18A 31VA FL235
LAMP:	2x10W 6V Tungsten Halogen FL210 3x10W FL310 2x35W 12V FL235
BATTERY:	Lead Acid 6V 10AH FL210 Nicad High Temperature to 70° 6V 4AH FL210N/FLD210N
CHARGER:	Single rate FL210/FL210N/FL310/FL235 Two rate FLD210N
CASE:	White enamelled zincseal steel or IP55 rated plastic
LAMP HEAD:	Injection moulded, fire retardant ABS with polycarbonate lens
STANDARD:	Charge indicator LED and test switch
OPTIONAL EXTRAS:	1. One or both lamp heads remote with 2.5M cable & mounting kit. 2. Five minute time delay facility
GUARANTEE:	Against faulty parts or workshop - 12 months
SERVICE:	White Lite operates a service section to fully service any White Lite fitting
COMPLIANCE:	AS/NZ 2293.1 1995, Building code of Australia 1990, S.I.S.I.R. CP19
CERTIFICATION:	See Information Sheet for spacings table.





Head Office:

42 Beaumont Road Mt Kuring-gai NSW 2080 Australia PO Box 47 Mt Kuring-gai NSW 2080 Australia
PHONE: +61 2 9457 8877 FAX: +61 2 9457 9596

CATS II MONITORING AVAILABLE



FL210 PHOTOMETRICS FOR SINGLE HEAD

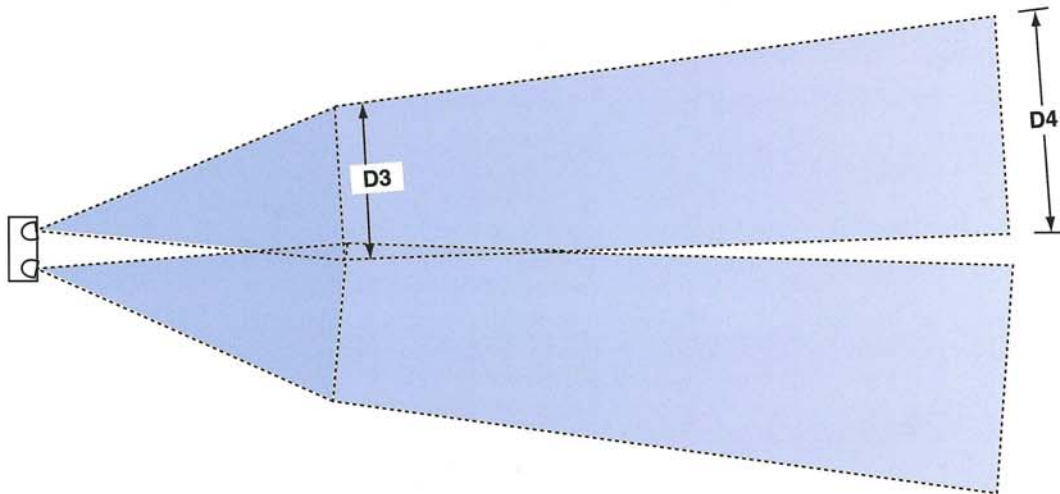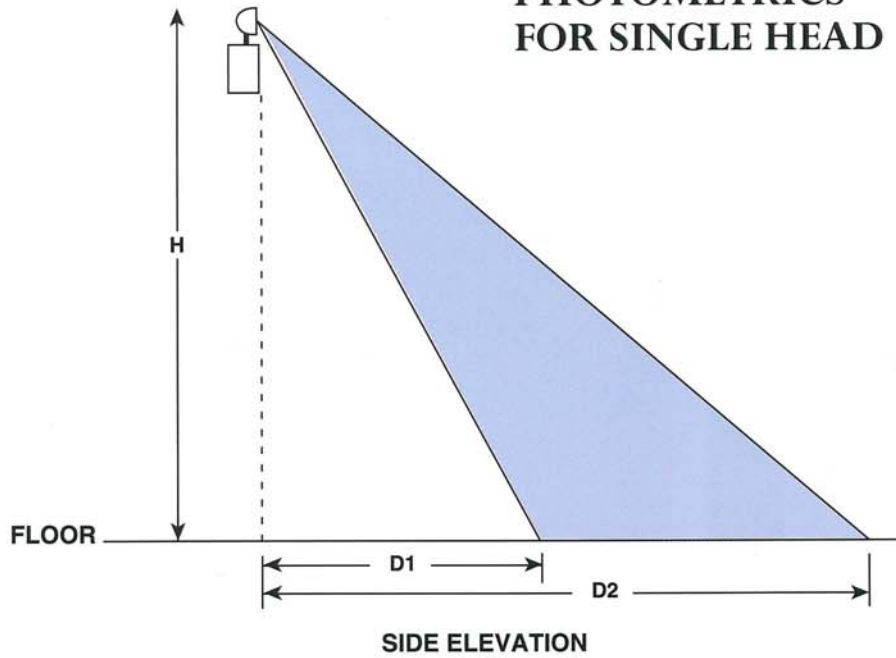

BEAM SPREAD TO 0.2 LUX MINIMUM (METRES)

Mounting Height H	D1	D2	D3	D4
2.5	5.7	18.0	2.5	4.0
3.0	6.5	19.5	3.0	4.1
4.0	7.9	21.0	3.6	4.5
5.0	9.2	22.5	4.3	4.9
6.0	10.3	24.0	4.9	5.2
7.0	11.3	25.0	5.1	5.4
8.0	12.2	26.0	5.5	5.7
9.0	13.0	26.5	6.0	6.0