

OPTEK WALL & CEILING



WL 2160 Maintained 8W




WL 2170 Maintained 8W

The curved feature of the Optek range of luminaires gives them a distinctive appeal. The curved diffusers are easy to read and can adapt to wall or ceiling mounting. The Optek range is made in light but strong polycarbonate and features the economical **T6** 8 watt fluorescent lamp.

SPECIFICATIONS:


SUPPLY:	240V±5% 50Hz .06A 13VA
LAMP:	Fluorescent 8W T6
BATTERY:	Nickel Cadmium high temperature 70°C
CHARGER:	Two rate - high C/10 low C/20
CASE:	Injection moulded polycarbonate, self extinguishing
CUTOOUT SIZE:	For semi - recessed Exits only - 138mm x 320mm
DIFFUSER:	Injection moulded polycarbonate
REFLECTOR:	White painted zinc seal steel
STANDARD:	Charge indicator LED and test switch
GUARANTEE:	Against faulty parts or workmanship - 3 years
SERVICE:	White Lite operates a service section to fully service any White Lite fitting
COMPLIANCE:	AS/NZS 2293.1 1995, Building code of Australia 1990, S.I.S.I.R. CP19
CERTIFICATION:	Single Exit Co: E1, C90: EO.63 / Double Exit Co: D1.6, C90: E1 See Information Sheet for spacings table.
REPORT NUMBER:	LAA9916701D/ LAA9917201D
CATALOGUE NUMBERS:	See reverse

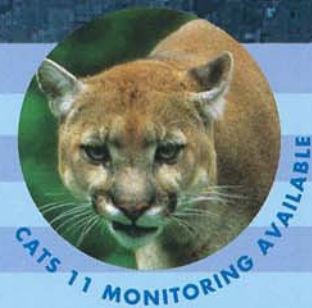


WHITE LITE INDUSTRIES

42 BEAUMONT ROAD MOUNT KURING-GAI NSW 2080 AUSTRALIA
 PHONE: +61 2 9457 8877 FAX: +61 2 9457 9596

Optek

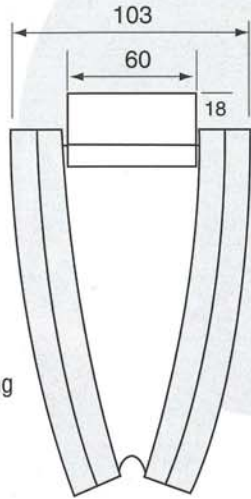

Catalogue Numbers:
Double Sided Surface-Ceiling
WL 2170 Maintained 8W

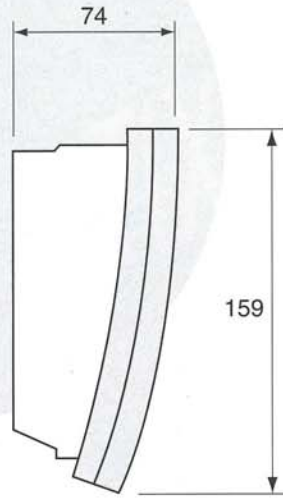

Catalogue Numbers:
Single Sided Surface-Wall
WL 2160 Maintained 8W

