




White Lite Industries

www.white-lite.com.au

sales@white-lite.com.au

Pathfinder - Emergency NiCad Halogen

Small but powerful, this halogen emergency luminaire recesses discretely into most ceilings for superb luminance in the event of a power failure. The NiCad is suitable for almost all ceilings with limited cavity clearance. Available with CATS II system monitoring and surface mount miniature reflector.

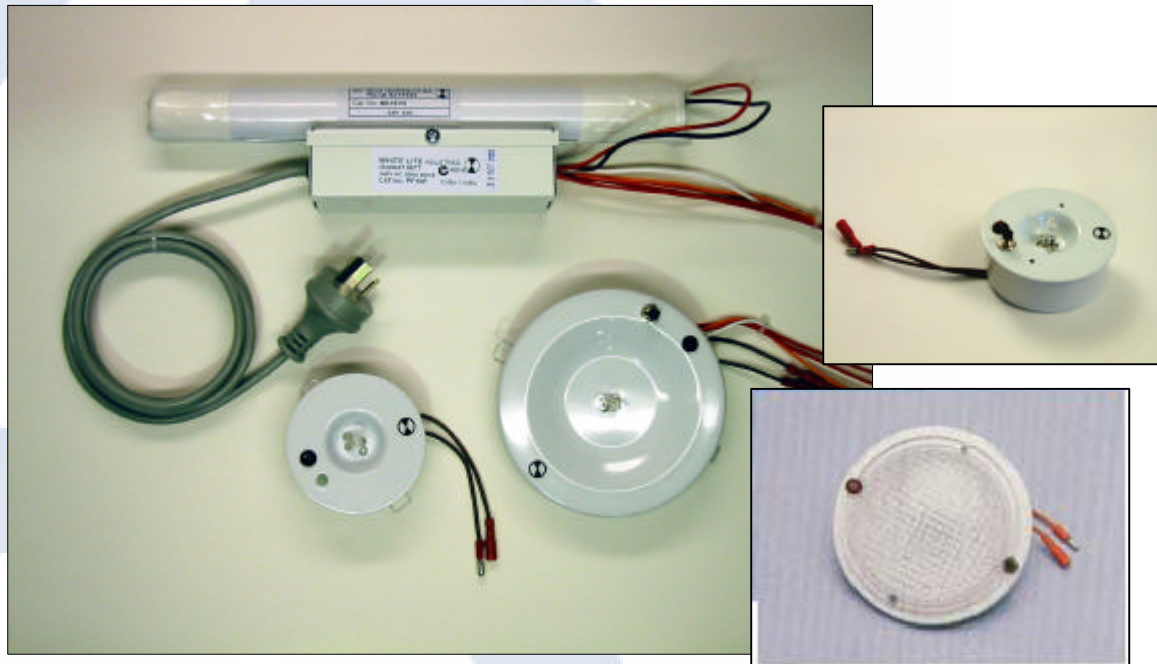

Model No.	Single Rate	Miniature	Surface Miniature	Polycarbonate
Standard	PF10F	PFM10F	PFMS10F	PF10F-PC

Nb: CATS II add 'C' - eg PFC10F
Dual Rate add 'D' - eg PFD10F

SUPPLY	240V +5% .03A.7VA
LAMP	6V 10W Tungsten Halogen G4
BATTERY	Nickel Cadmium high temperature 70°C
CHARGER	Single rate: PF10F/PFM10F Dual Rate: PFD10F/PFMD10F
CASE	White enamelled zincseal steel (H: 45mm W: 45mm L: 145mm)
REFLECTOR	White colour bond steel PF10F/PFC10F (130 mm Dia.) PFM10F (80 mm Diam.)
CUT-OUT SIZE	PF10F/PFC10F (90 mm) PFM10F/PFMD10F (60 mm)
STANDARD	1.5 m Flex n Plug, Test Switch and LED Charge Indicator
OPTIONS	Protective cover on reflector
GUARANTEE	12 Months against faulty parts or workmanship
COMPLIANCE	AS/NZS 2293.1 1995, Building code of Australia 1990, S.I.S.I.R. CP19
CLASIFICATION	C0 D20 C90 D20

ABN: 69 000 123 508

Unit 5-7/42 Beaumont Road Mt Kuring-gai
NSW 2080 AUSTRALIA
+61 2 9457 8877 +61 2 9457 9596

