
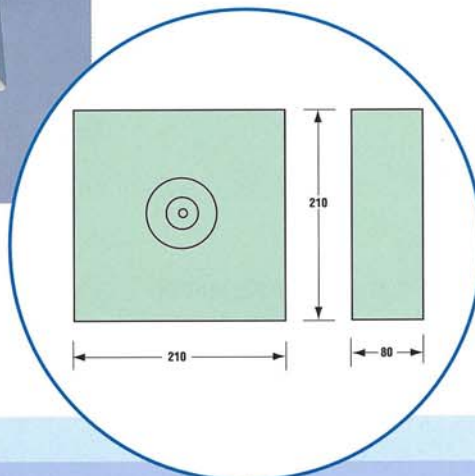


PATHFINDER SQUARE SURFACE NICAD EMERGENCY

The square surface mounted pathfinder is only 80mm deep yet is fully self - contained.
CATS II monitored version available.

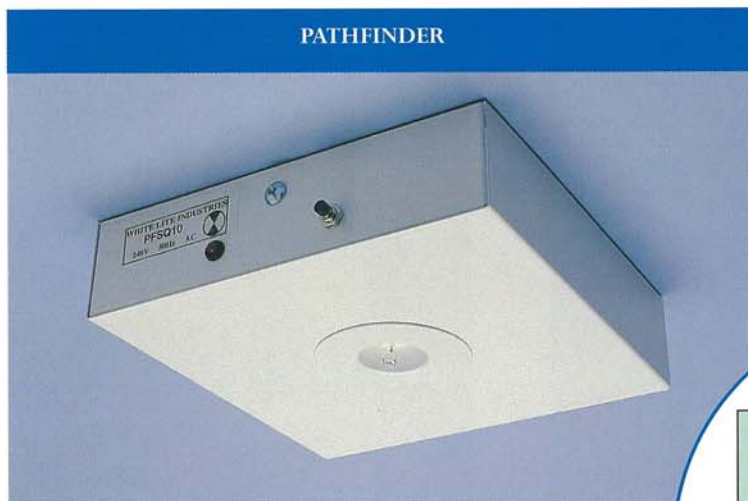

CATALOGUE NUMBER: STANDARD: NON-MAINTAINED PFSQ10/PFSQD10
CATS II: PFSQC10/PFSQDC10

SPECIFICATIONS:

| | |
|----------------|---|
| SUPPLY: | 240V±5% 50Hz .01A. 7VA |
| LAMP: | 6V 10W Tungsten Halogen. G4 |
| BATTERY: | Nickel Cadmium high temperature to 70°C |
| CHARGER: | Single rate: PFSQ10 Two rate - high C/10 low C/20: PFSQD10 |
| CASE: | White powder coated zincseal steel |
| REFLECTOR: | White painted zincseal steel |
| STANDARD: | Charge indicator LED and test switch |
| GUARANTEE: | Against faulty parts or workshop - 12 months |
| SERVICE: | White Lite operates a service section to fully service any White Lite fitting |
| COMPLIANCE: | AS/NZS 2293.1 1995, Building code of Australia 1990, S.I.S.I.R. CP19 |
| CERTIFICATION: | Co D20 C90 D20 See Information Sheet for spacings table. |
| DIMENSIONS: | 210mm x 210mm x 80mm deep |

MAXIMUM SPACINGS

| | | | | | | | | | | | | |
|------------------|------|------|------|------|------|------|------|------|------|------|------|------|
| MOUNTING HEIGHT: | 2.1 | 2.7 | 3.0 | 3.6 | 4 | 4.5 | 5 | 6 | 7 | 8 | 9 | 10 |
| D20 | 13.2 | 14.1 | 14.5 | 15.1 | 15.5 | 15.8 | 16.1 | 16.4 | 16.3 | 16.0 | 15.4 | 14.5 |



Head Office:

42 Beaumont Road Mt Kuring-gai NSW 2080 Australia PO Box 47 Mt Kuring-gai NSW 2080 Australia
PHONE: +61 2 9457 8877 FAX: +61 2 9457 9596

CATS II MONITORING AVAILABLE

