
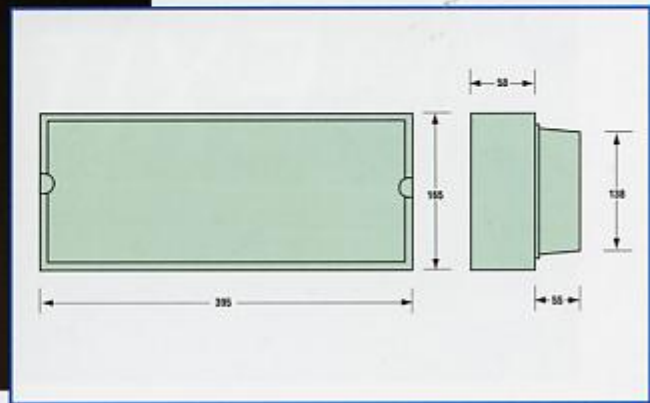


W E A T H E R P R O O F E X I T

White Lite's heavy duty weatherproof exit sign rated to IP65 has a diecast aluminium base for cool running and uses the Exit-Tec system for energy efficiency. It can be wall or ceiling mounted (not IP rated) making it the first quality double sided weatherproof Exit to be economically priced. CATS II monitored version available.

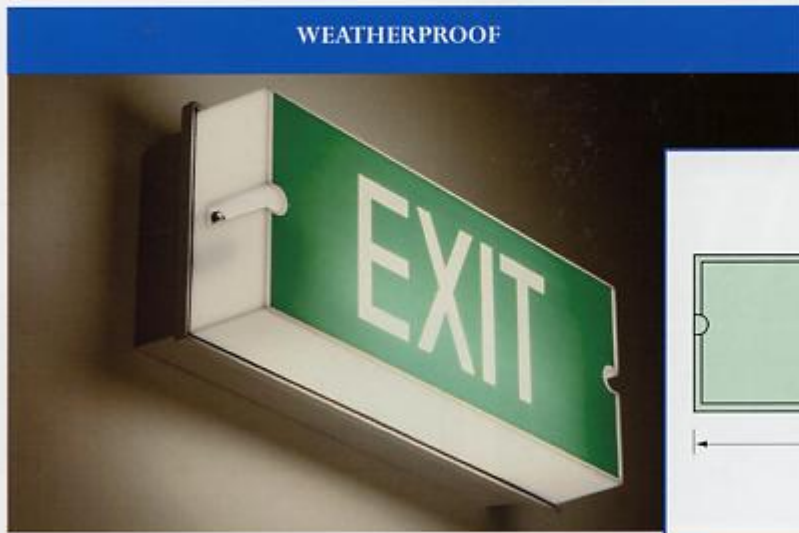

CATALOGUE NUMBER:

STANDARD:
CATS II:

NON-MAINTAINED
WP010/1-11
WPC010/1-11

MAINTAINED
WP110/1-11
WPC110/1-11

SUSTAINED
WP210/1-11
WPC210/1-11


SPECIFICATIONS:

SUPPLY:	240V±5% 50Hz .06A. 14.5VA
LAMP:	Fluorescent 10WT8
BATTERY:	Nickel Cadmium high temperature to 70°C
CHARGER:	Two rate - high C/10 low C/20
CASE:	Die cast aluminium
DIFFUSER:	Injection moulded, U.V. stabilised medium impact styrene or acrylic - Silk screened
REFLECTOR:	White painted zincseal steel
STANDARD:	Charge indicator LED and test switch
GUARANTEE:	Against faulty parts or workmanship - 12 months
SERVICE:	White Lite operates a service section to fully service any White Lite fitting
COMPLIANCE:	AS/NZ 2293.1 1995, Building Code of Australia 1990, S.I.S.I.R. CP19
CERTIFICATION:	Co C5 C90 C5. See Information Sheet for spacings table.
DIMENSIONS:	395mm length x 165mm height x 58mm depth


WALL MOUNTED



CEILING MOUNTED SINGLE SIDED



CEILING MOUNTED DOUBLE SIDED



Head Office:

42 Beaumont Road Mt Kuring-gai NSW 2080 Australia PO Box 47 Mt Kuring-gai NSW 2080 Australia
PHONE: +61 2 9457 8877 FAX: +61 2 9457 9596

CATS II MONITORING AVAILABLE

