

The Aurora sign breaks new boundaries for exit signs in being one of the most efficient and smallest signs on the market with a lamp replacement design life of 10 years, thanks to White Lite's new "LED-TEC" electronic control.

Fully complying with the stringent AS2293 thermal and photometric tests, the AURORA passes with flying colours. The difficult luminance (brightness) on the face test is always a difficult one for blade type exit signs. White Lite's Edgelight II was the first to pass for an edgelight in 1989 and the process was quickly copied by others.

The AURORA has these great features:


- Up to 10 year lamp life with LED panel.
- Low current drain gives big power savings.
- Miniature profiles aesthetically enhance the message without any bulk.
- 32 LEDs for reliability and high lumen output.
- Ceiling mounting bar with slide in illuminated diffuser and LV end plug.
- Remote control driver uses mini 60mm ceiling aperture for access.
- Clip into ceiling fixing plate.
- Complete with 3 pin flex and plug for fast installations.
- Current sign with EXIT decal and "Peel-it" arrows or "Pictograph" symbols.
- Patented system includes wall or ceiling mounting.
- New sizes for Pictograph exit signs 100mm, 150mm, 200mm and 250mm element heights.



Ceiling Mount






Wall Mount

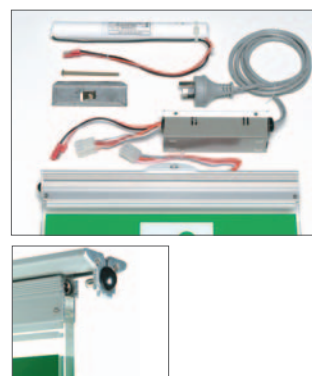

MODEL NUMBERS. AU16M, AU24M, AU32M, AU40M

<b>SUPPLY</b>	240V +-5% 50hz AC, 0.03A
<b>POWER CONSUMPTION</b>	Total Power Consumption 7.5W at 240V AC
<b>LAMP</b>	32 white LED panel 2W
<b>BODY</b>	Aluminium anodised
<b>DIFFUSER</b>	Acrylic with vinyl decals
<b>MOUNTING OPTIONS</b>	Wall and Ceiling
<b>STANDARD</b>	LED charge indicator and test switch
<b>MONITORING OPTIONS</b>	BULLDOG Powerline & Dataline, CATS II Dataline
<b>DIMENSIONS</b>	AU16M 16 metre viewing distance sign H 161mm x L 218mm AU24M 24 metre viewing distance sign H 213mm x L 326mm AU32M 32 metre viewing distance sign H 263mm x L 418mm AU40M 40 metre viewing distance sign H 313mm x L 518mm
<b>COMPLIANCE</b>	AS/NZS2293.1 1995, AS2293.1&.3 2005, BCA1990-2006
<b>CERTIFICATION</b>	Certification Numbers: Thermal: LSA 0506801T Photometric: LSA9075A
<b>GUARANTEE</b>	12 months against faulty parts or workmanship

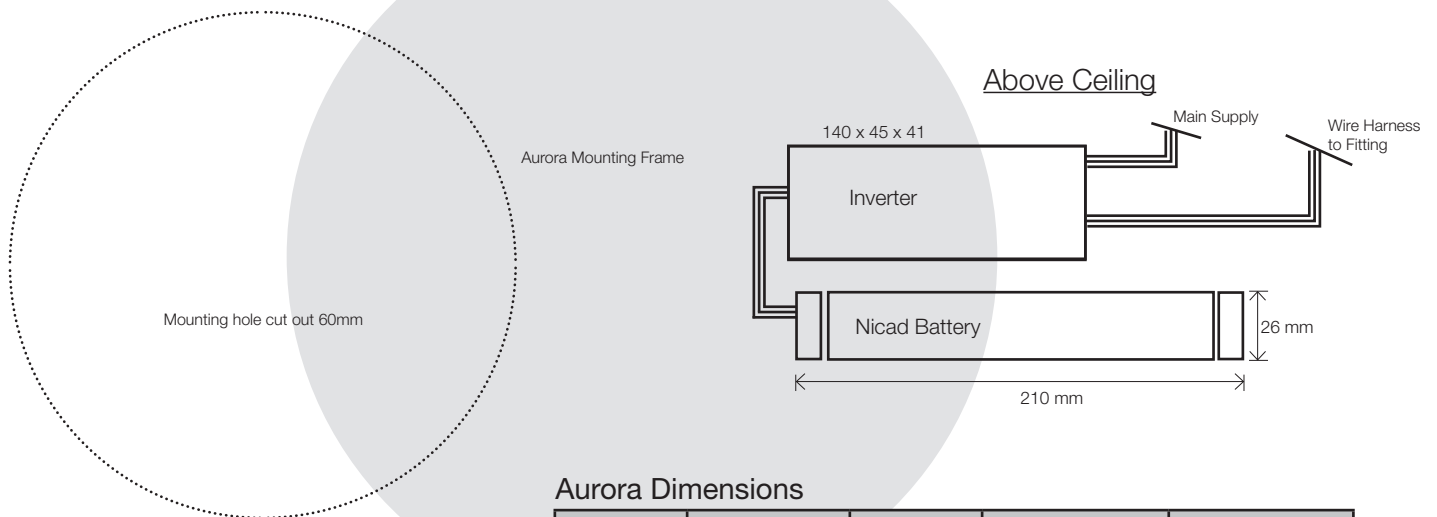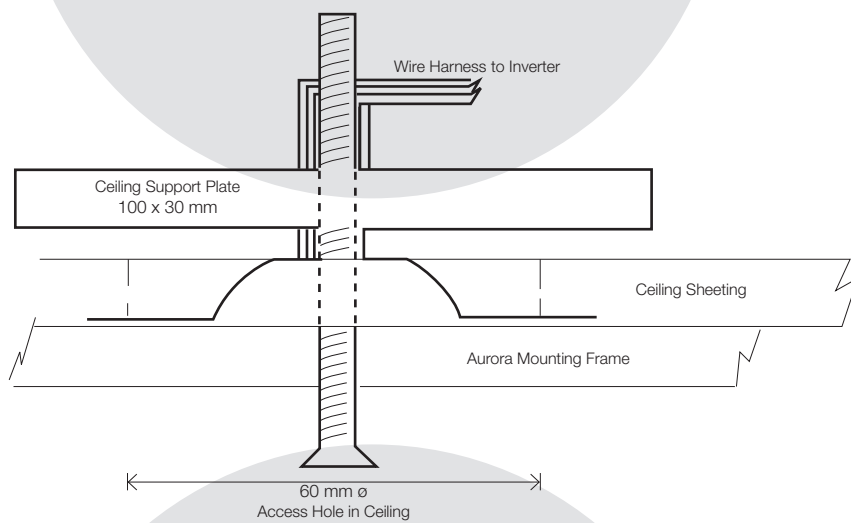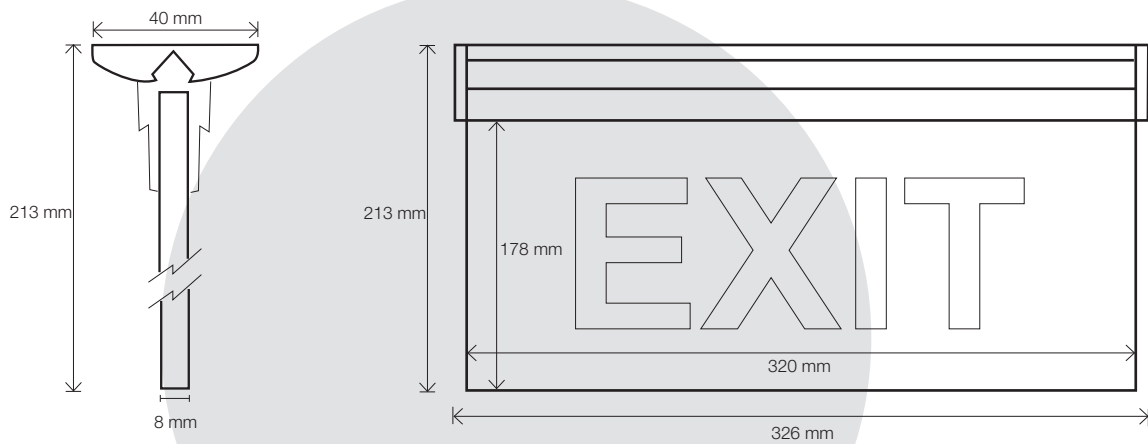

**Aurora Dimensions**

Product Code	Description	Viewing Distance	Pictorial Height / Width	Product Total Height / Width
AU16M	Aurora 16M	16m	102 x 202 mm	161 x 218 mm
AU24M	Aurora 24M	24m	152 x 310 mm	213 x 326 mm
AU32M	Aurora 32M	32m	202 x 404 mm	263 x 418 mm
AU40M	Aurora 40M	40m	252 x 502 mm	313 x 518 mm